

# TIE04ALSOL-xx Covered Tie Wire

## Description:

Covered tie wire consists of a #4 AWG solid, fully annealed aluminum conductor covered by a 0.045" extruded layer of black thermoplastic rubber (TPR).




## Benefits:

- Eliminates tracking and erosion caused by the use of bare tie wire on a covered conductor
- Conductor and covering are flexible and have no tendency to "springback"
- TPR covered tie wire grips covered conductor better than PVC and other tie wires

## Application:

Covered tie wire is used to tie a covered conductor to a Hendrix polyethylene pin type insulator. The tying method is the same as that used with bare conductors and ties. Conductor covering should not be removed.

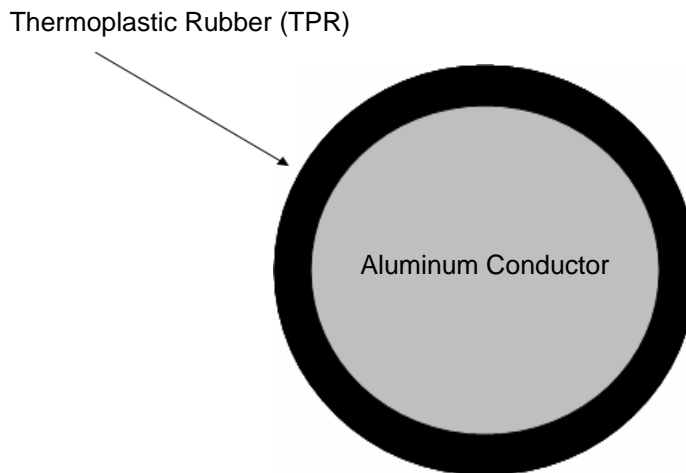

Catalog No.	TIE04ALSOL-00
Outside Diameter	0.30
Weight (lb/ft)	0.053
Standard Packaging	500 ft. hand coils (25 lbs.)